



Product name


Adjustable ball joint extractors lever type










For extracting ball pins when dismantling ball joints, track-rod ends on track rods, universal use for passenger cars, delivery vehicles and medium-sized commercial goods vehicles.




Art. No. 129-2


Series 129-2

EAN 4021176024771



	Technical attribute	Metric	Imperial
	Fork opening	32 mm	1 1/4 inch
	Opening range	70 mm	2 3/4 inch
	For ball-joint sizes	27 - 40 mm	
	Application	universal	universal
	Maximum torque	35 Nm	25.8 ft lb
	Maximum load	3 t	3.3 US t
	Weight	1.13 kg	
	Mouth height min.	2 - 15 mm	1/8 - 5/8 inch
	Mouth height max.	mm	inch

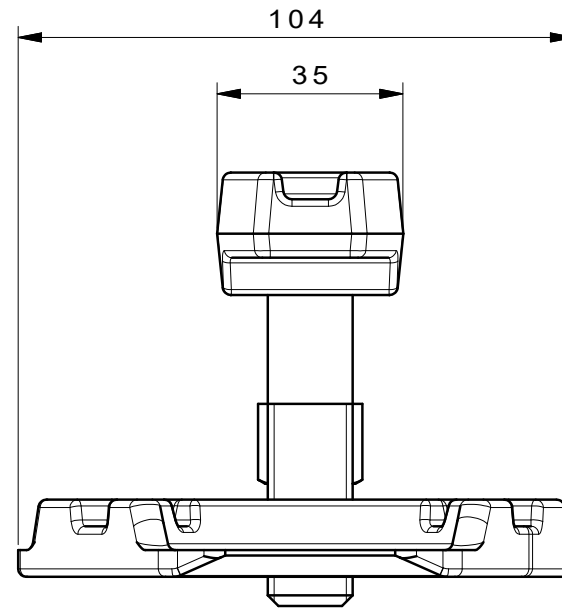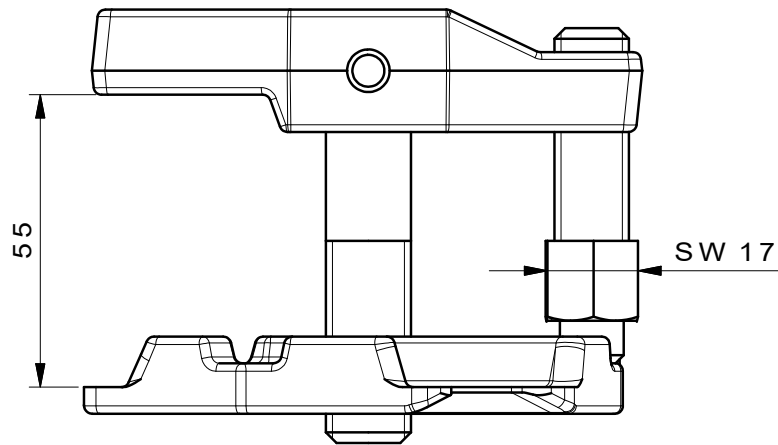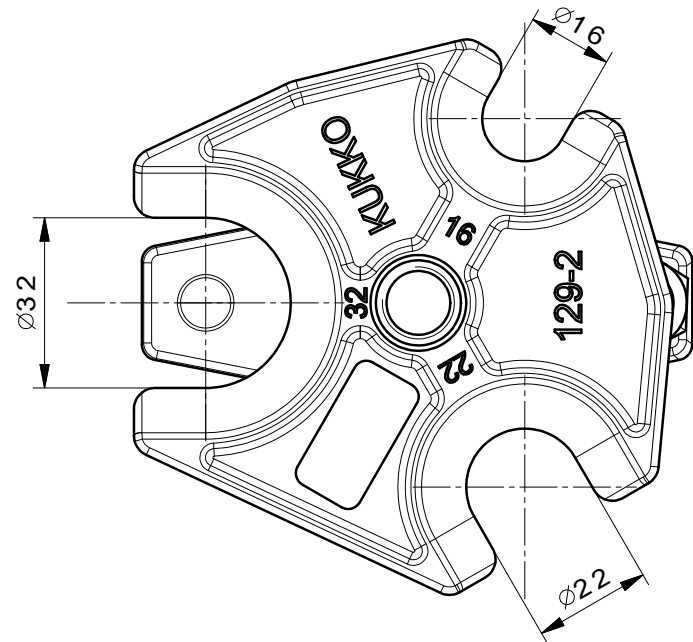

 Kleinbongartz & Kaiser oHG Werkzeugfabrik Hilden - Germany	Dokumentname: 129-2_Kugelgelenk-Ausdrücker		Toleranz: DIN ISO 2768-m
	Dokumentbeschreibung: Baugruppe		Material: Hoch legierter Werkzeugstahl / High alloy tool steel
Erstellt von: Breidenbach	Erstellungsdatum: 30/03/2015	Maßstab: 1:1	
Teilbeschreibung: Kugelgelenk-Ausdrücker/ Adjustable ball joint extractors lever type			Wärmebehandlung / Härte: vergüteter Stahl/ tempered steel
			Oberflächenbehandlung:
Artikelnummer / ZNR.: 129-2	Dokumentversion: -	Schutzvermerk ISO 16016 beachten	