



Product name


Ball joint extracting









For extracting tight-fitting ball pins when dismantling ball joints, track-rod ends on track rods, for medium-sized heavy goods vehicles, buses and construction vehicles.

Art. No. 129-5


Series 129-5





EAN 4021176865084



	Technical attribute	Metric	Imperial
	Fork opening	36 mm	1 3/8 inch
	Opening range	70 mm	2 3/4 inch
 DIN ISO 7803	For ball-joint sizes	40 - 50 mm	
	Application	mittlere und schwere LKW, Busse und Baufahrzeuge / medium-sized and heavy trucks, busses and construction vehicles	mittlere und schwere LKW, Busse und Baufahrzeuge / medium-sized and heavy trucks, busses and construction vehicles
	Maximum torque	200 Nm	147.5 ft lb
	Maximum load	15 t	16.5 US t
	Weight	4.24 kg	
	Mouth height min.	5,8 - 22,5 mm	1/4 - 7/8 inch



	Technisches Attribut	Metric	Imperial
	Mouth height max.	mm	inch

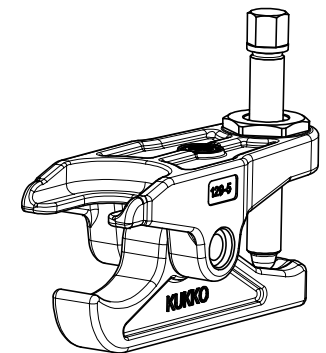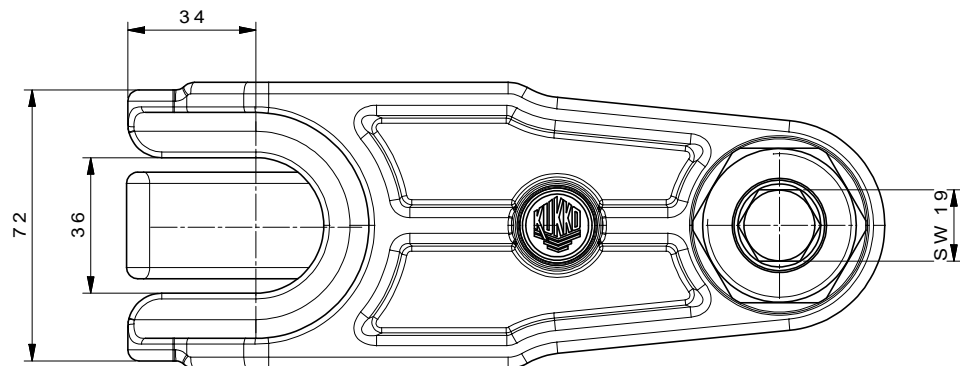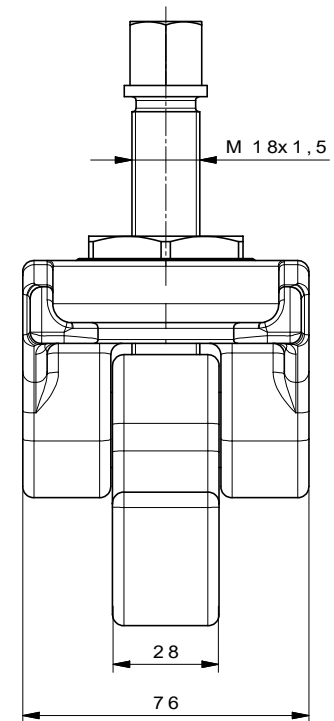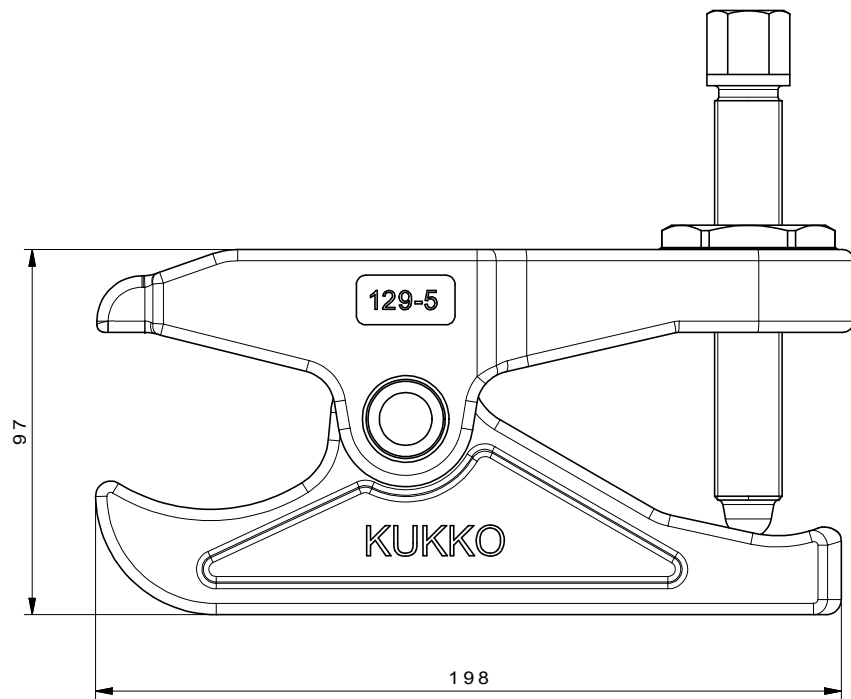

 Kleinbongartz & Kaiser oHG Werkzeugfabrik Hilden - Germany	Dokumentname: 129-5_Kugelgelenk-Ausdrücker	Toleranz: DIN ISO 2768-m
	Dokumentbeschreibung: Baugruppe	Material: Hoch legierter Werkzeugstahl / High alloy tool steel
Erstellt von: Breidenbach	Erstellungsdatum: 30/03/2015	Maßstab: 1:1
Teilbeschreibung: Kugelgelenk-Ausdrücker/ Tools for exchanging wipers		Wärmebehandlung / Härte: vergüteter Stahl/ tempered steel
Oberflächenbehandlung:		
Artikelnummer / ZNR.: 129-5	Dokumentversion: -	Schutzvermerk ISO 16016 beachten