



Product name *


Universal 3-jaw puller with narrow jaws

For removing bearings, gears, discs, etc. for tight or difficult-to-access spaces.

Art. No. 30-2-S

Series 30-S

EAN 4021176727856



	Technical attribute	Metric	Imperial
	Spread	35 - 160 mm	1 3/8 - 6 3/8 inch
	Depth	150 mm	5 7/8 inch
	Spread used internal	100 - 220 mm	3 7/8 - 8 5/8 inch
	Hexagon drive (male)	22 mm	
	Maximum load	5 t	5.5 US t
	Maximum torque	120 Nm	88.5 ft lb
	Weight	3.78 kg	
	Space below	4 mm	3/16 inch
	Space next to it	19 mm	3/4 inch
	Number of jaws	3	3



Technologies



GLIDE & FIX

The improved geometry guarantees quick and easy movement of the jaws on the cross-beam.



ARMLOCK

The cross-legged jaws guarantee maximum stability for suspending the jaws in the slider.



SWITCH

A two-sided spindle tip provides optimal adjustment of the spindle to the shaft.







Spare part

Art. No.	Product name
621220	Mechanical pressure spindle.
2-151-S	3 narrow jaws (set)
30-2-T	3-jaw cross bar

Accessories

Art. No.	Product name
2-301-S	3 narrow jaws (set)
2-V-150-S	3 jaw extensions (set)
K-600-025	Set of interchangeable pressure pads for KUKKO pressure screws

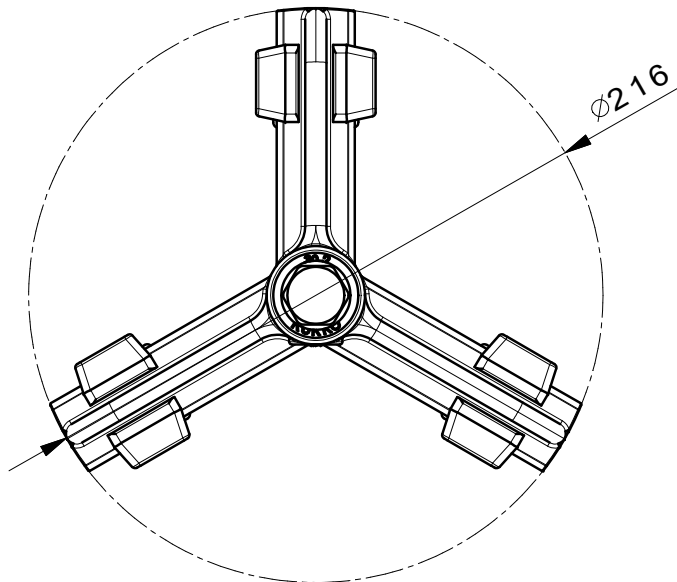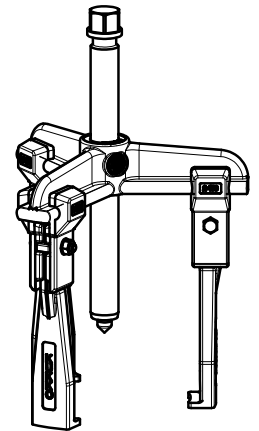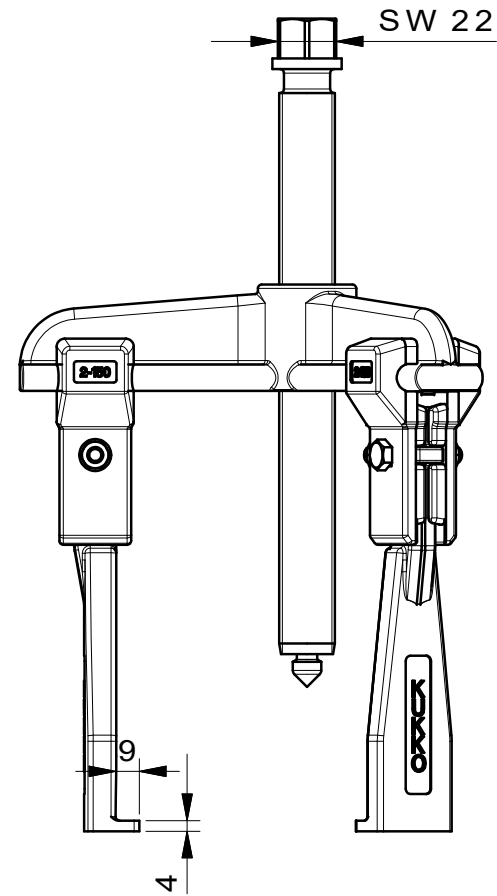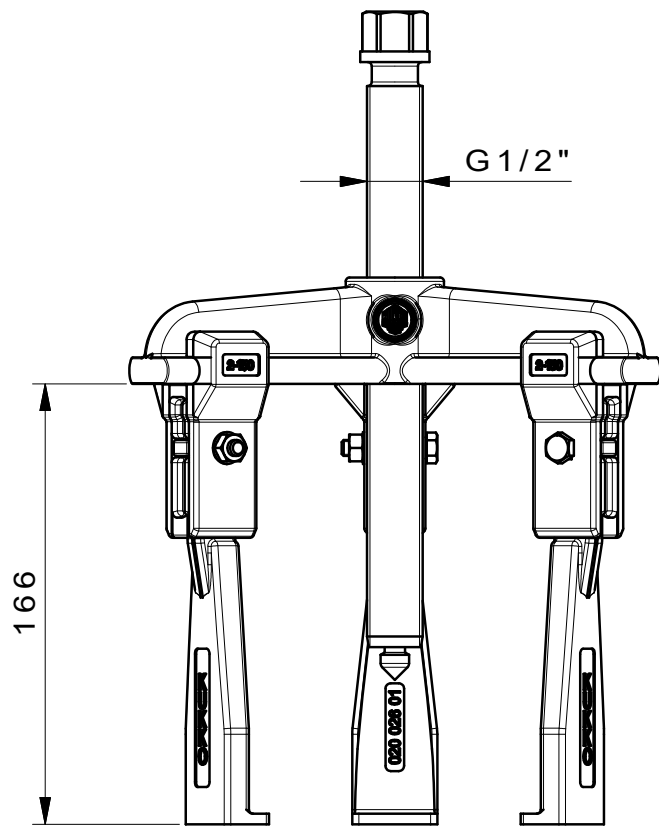

 Kleinbongartz & Kaiser oHG Werkzeugfabrik Hilden - Germany	Dokumentname: 30-2-S_Abzieher	Toleranz: DIN ISO 2768-m
	Dokumentbeschreibung: Baugruppe	Material: Hoch legierter Werkzeugstahl / High alloy tool steel
Erstellt von: Breidenbach	Erstellungsdatum: 20/06/2017	Maßstab: 1:2
Teilbeschreibung: 3-armiger Universal Abzieher mit schmalen Abzughaken/ Universal 3-jaw puller with narrow jaws		Wärmebehandlung / Härte: vergüteter Stahl/ tempered steel
Oberflächenbehandlung:		Schutzvermerk ISO 16016 beachten
Artikelnummer / ZNR.: 30-2-S	Dokumentversion: -	